

**Smaller, lighter and
even more powerful**



www.prebena.com

Pneumatic Stapler 4C-Z50

for staples type Z from 16 - 50 mm (5/8" - 2")



recommended by:

type Z

Xella
Neues Bauen

for:
fermacell

EUROCODE 5
nach EN 14592




Technical details:

Weight: 2,2 kg (4.85 lb.)
 Operating pressure:
 approx. 5 - 8 bar (71 - 114 psi.)
 Air requirement:
 approx. 1,72 l / staple
 (0.378 gal./ staple)

Smooth impact:

Fermacell, plasterboard, boxes, corrugated cardboards, cedar and shake shingles, chipboards, packaging, substructures, saving formwork, cardboard pallets, prefab construction and much more.

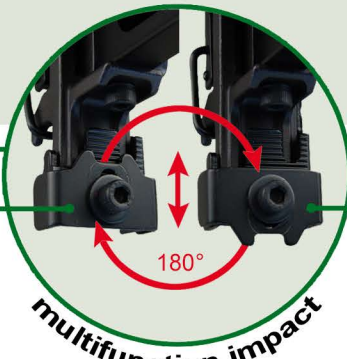

Splined impact:

groove and tongue profile, watherboarding, wire fences, windbreak fences and much more.



Impact with wide contact surface for plaster board and fermacell as accessories (ET44221701) available.

- 180° rotatable for work with smooth ore splined impact
- adjustable depth control
- available with and without impact

Standard equipment:

- increased driver
- adjustable exhaust
- ergonomic handle
- safety device